

东莞市志展五金塑胶制品有限公司

DongGuan ZhiZhan Hardware Plastic Products Co., LTD

TEL:0769-81802125

FAX:0769-81802126

DOCUMENT NO.

RDE0321A

SERIAL NO.



A2544H00-NP

Material:Nylon 66 UL94V-0/94v2(White)

* Unit Quantity: 1000Pcs/Bag

Specifications:




Poles	2-8Poles
Pitch between poles	2.54mm
Rated Voltage	250V AC,DC
Rated Current	2A(AWG#22)
Withstand Voltage	800V AC/minute
Contact Resistance	20mΩ(MAX)
Insulation Resistance	1000mΩ(MIN)
Temperature Range	-25°C ~ +85°C*
Applicable Wire Range	AWG #20~#26

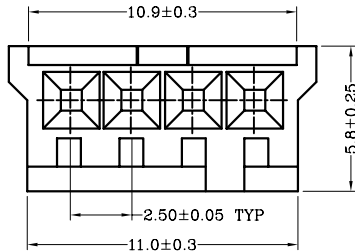


Dimensional & Ordering Information:

Circuits	Part No	Dimensions	
		A	B
2	A2544H00-2P-0	2.50	7.30
3	A2544H00-3P-0	5.00	9.90
4	A2544H00-4P-0	7.50	12.50
5	A2544H00-5P-0	10.00	14.80
6	A2544H00-6P-0	12.50	17.40
7	A2544H00-7P-0	15.00	20.10
8	A2544H00-8P-0	17.50	22.20


A2544 Series 2.54mm pitch crimp terminal

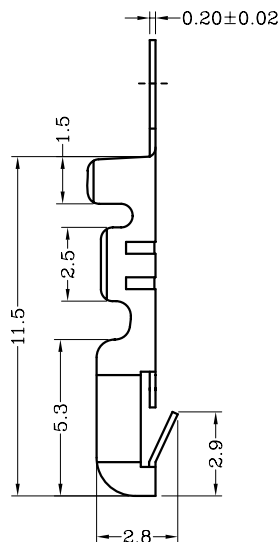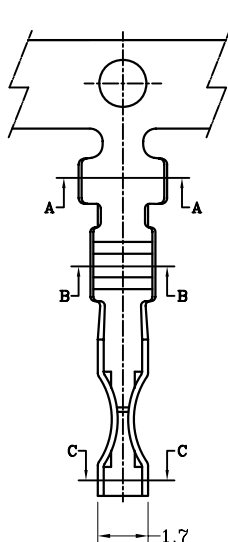

Section A-A



Section B-B



Section C-C

Specifications & Ordering Information:

Part No.	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A2544TOP-2	AWG #22~#28	1.75mm(max)	Phosphor bronze	plated	10,000 PCS
A2544TOB-2	AWG #22~#28	1.75mm(max)	Brass	Tin-plated	10,000 PCS