

东莞市志展五金塑胶制品有限公司

DongGuan ZhiZhan Hardware Plastic Products Co., LTD

TEL:0769-81802125

FAX:0769-81802126

DOCUMENT NO.

RDE0323A




SERIAL NO.

A3811H02-NP

Material:PBT UL94V-0 +30%GF(Black)
Unit Quantity: 300 Pcs/Bag



Specifications:

Poles	5Poles(15P)
Pitch between poles	3.81mm
Rated Voltage	30V AC,DC
Rated Current	1.5A(AWG#24)
Withstand Voltage	500V AC/minute
Contact Resistance	30mΩ (MAX)
Insulation Resistance	1000mΩ (MIN)
Temperature Range	-40°C ~ +85°C*
Applicable Wire Range	AWG #18~#20

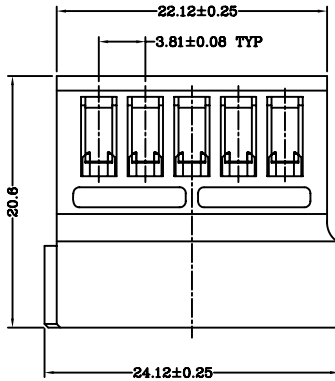


A3811 Series 3.81mm pitch SATA Series crimp terminal

A--Gold Plated Area.
B--Tested Area For Coating Thickness.
C--Point of Measurement For Coating Thickness

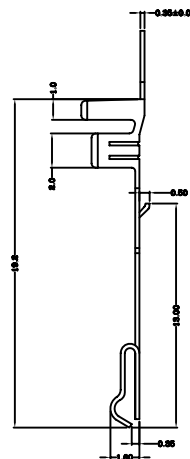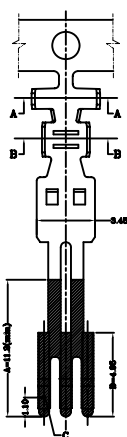

- 0*--AU Flash
- 00--1μ"
- 0A--3μ"
- 0B--4μ"
- 0C--5μ"
- 0D--15μ"
- 0E--30μ"
- 0F--50μ"
- 0G--10μ"
- 0H--3μ"
- 0I--20μ"
- 0J--25μ"



Specification & Ordering Information:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel
A3811T2P-0*	AWG #18*2~#20*2	ø2.20mm(max)	Phosphor bronze	Gold over Nickel	4,000 pcs